

Datasheet

→ **SVATLRBII** 

06/10/2025



Technical data

Pushbutton with ring illumination

Type	SVATLRBII
Series	SHORTRON®
Rubric	Pushbutton
Approvals	CCC, CE, cURus, DNV, ENEC10, VDE, UKCA



→ General data

Design	Round
Illumination	Yes
Operating temperature	-25 °C ... 70 °C
Panel cut-out	Ø 22.3 mm
Mounting depth	25.1 mm
Colour	Blue
Lens colour	Stainless steel, brushed
Front bezel colour	Stainless steel, polished
Contact material	AgNi
Storage temperature	-40 °C ... 80 °C
Degree of protection front	IP65 IP67
Material group	I

→ Electrical data

<i>Rated operating voltage</i> <i>IEC/EN 60947-5-1</i>	240 V AC
	120 V AC
	250 V DC
	125 V DC
	60 V DC
	24 V DC
<i>Rated operating current</i> <i>IEC/EN 60947-5-1</i>	1.5 A AC
	3 A AC
	0.27 A DC
	0.55 A DC
	1 A DC
	2 A DC
<i>Rated insulation voltage</i> <i>IEC/EN 60947-5-1</i>	250 V AC
	250 V DC
<i>Rated voltage</i> <i>IEC/EN 61058-1</i>	250 V AC/DC
<i>Rated current</i> <i>IEC/EN 61058-1</i>	6(4) A
<i>Contact resistance</i>	< 20 mΩ NO
<i>Electrical lifetime</i>	1,000,000 switching cycles
<i>Illuminant color</i>	White
<i>Utilization category</i> <i>IEC/EN 60947-5-1</i>	AC15 B300
	DC13 Q300
<i>Contact type</i>	2NO
<i>Light source Power</i>	14 mA DC 24 V
<i>Illuminant</i>	LED integrated
<i>Light source connection</i>	X1...Anode, X2...Kathode
<i>Operating temperature illuminant</i>	max. 30 V AC/DC
<i>Bouncing time</i>	< 10 ms NO
<i>Switching capacity</i>	240 V AC/DC
	1.5 A
	250 V AC/DC
	6 A

<i>Voltage minimum</i>	5 V
<i>Current minimal</i>	1 mA under laboratory conditions
<i>Thermal continuous current IEC/EN 60947-5-1</i>	5 A AC
<i>Overvoltage category</i>	II
<i>Pollution degree</i>	2

Electrical note

DC13: > 100,000 switching cycles

→ Mechanical data


<i>Connection</i>	Faston terminals 2.8 mm x 0.8 mm
<i>Operating travel</i>	2.3 mm
<i>Tightening torque fixing nut</i>	1.5 Nm ... 1.9 Nm
<i>Mounting position</i>	Any
<i>Mechanical lifetime</i>	1,000,000 switching cycles
<i>Switching function</i>	Momentary function

Mechanical note


- Designs for blade terminals: use partially or fully insulated blade receptacles

Technical drawings


→ Dimensional drawing

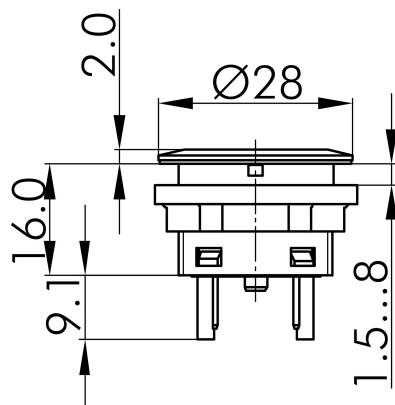

→ Cutout dimensions

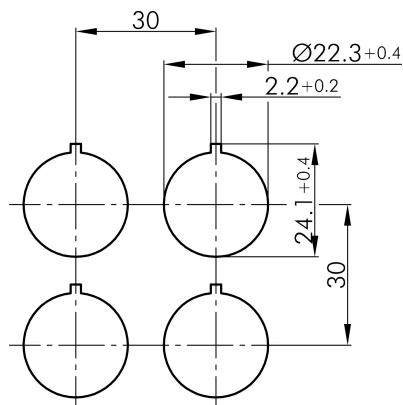

→ Circuit diagram

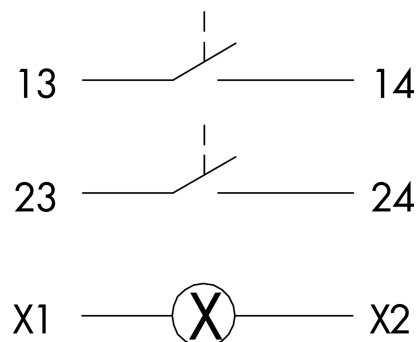

→ Switching path diagram

0 1 2

13/14

23/24