

Datasheet

→ RKSSMA16

07/31/2026



Technical data

Key switch, maintained

Type	RKSSMA16
Series	OKTRON®-R
Rubric	Key-operated switch
Approvals	CCC, CE, UKCA, UR



→ General data

Design	Round
Operating temperature	-25 °C ... 70 °C
Panel cut-out	Ø 16.2 mm
Mounting plate thickness	1 mm ... 5 mm
Front bezel colour	Silver-coloured
Storage temperature	-50 °C ... 85 °C
Degree of protection front	IP65

→ Electrical data

Enclosure type information acc. to UL	Type 1 indoor
--	---------------

→ Mechanical data


<i>Mounting position</i>	Any
<i>Switching function</i>	Latching function
<i>Switching position</i>	0° zero position 90° maintained, key removable

Note


- Includes 2 keys
- Different locking possible on request

Technical drawings

→ Dimensional drawing

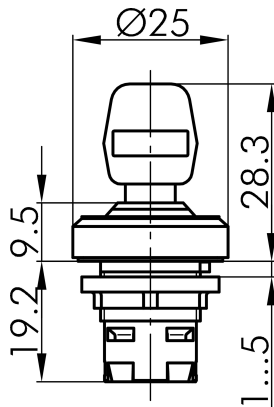

→ Cutout dimensions

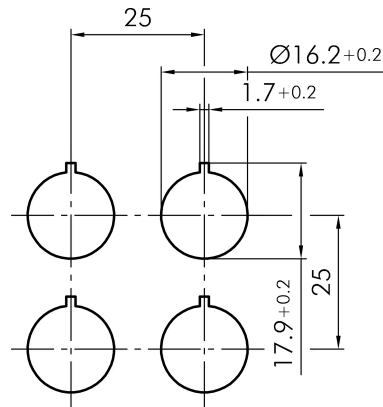

→ Position indicator

