

SNSG+SG-24V

13.08.2024

Buzzer

operating voltage: 24V DC
operating current: 10mA
signal frequency: 4.1 +/- 0.5 kHz
volume: max. 83 db (10cm)
operating temperature: -20°C ... 70°C



General Data

Type reference:	SNSG+SG-24V
Description:	Buzzer
Approvals:	CCC, CE
Degree of protection:	IP65
Connection type:	Faston terminals 2.8 x 0.8 mm
Max. storage temperature:	-30°C ... 80°C
Max. operating temperature:	-20°C ... 70°C


Electrical features

Operational voltage:	24 V DC
Operational current:	max. 10 mA
Signal frequency:	4.1 +/- 0.5 kHz
Volume:	max. 83dB / 10cm


Note

Permanent operation: tested up to 24h at room temperature

Dimensional drawing

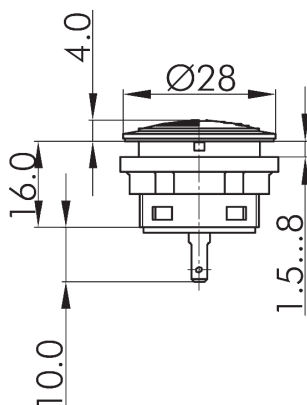

Circuit diagram



Drilling pattern

