

# Datasheet

→ **SVASSA17** 

11/04/2024



## Technical Data

Key actuator, maintained

|               |                                  |
|---------------|----------------------------------|
| <i>Series</i> | SHORTRON® intermediate structure |
| <i>Rubric</i> | Key switch                       |
| <i>Shape</i>  | round                            |



## → General Data

|                              |                                        |
|------------------------------|----------------------------------------|
| <i>Illumination</i>          | No                                     |
| <i>Protection class</i>      | IP65                                   |
| <i>Approvals</i>             | CCC, CE, cURus, DNV, ENEC10, VDE, UKCA |
| <i>Operating temperature</i> | -25 ... 70 °C                          |
| <i>Storage temperature</i>   | -40 ... 80 °C                          |
| <i>Mounting position</i>     | any                                    |
| <i>Mounting aperture</i>     | Ø 22.3 mm                              |
| <i>Front frame color</i>     | Stainless steel, glossy                |

## → Mechanical Data

*Tightening torque (fastening nut)*

min. 1.5 Nm  
max. 1.9 Nm

*Mechanical life*

30,000 Switching cycles

*Operating travel*

2.3 mm

*Switching function*


Maintained

*Switching position*


-45° Key removal  
45° maintained

## Technical Drawings

→ Dimensional drawing

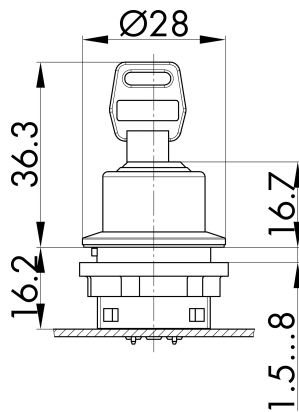

→ Cutout dimensions

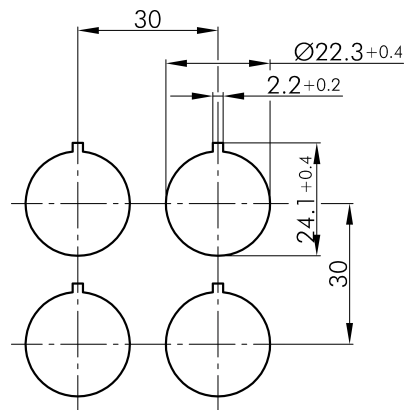

→ Position indicator

