Datasheet

→ QXJNSG+SG-24V

03/11/2026

Technical data

Buzzer

Type	QXJNSG+SG-24V
Series	QUARTRON-JUWEL®
Rubric	Buzzer
Approvals	CE, UKCA



Illustration similar

→ General data

Design	Square
Operating temperature	-20 °C ... 60 °C
Panel cut-out	24 x 24 mm
Mounting depth	55.7 mm
Colour	Black/white
Front bezel colour	Black
Weight	21.18 g
Storage temperature	-30 °C ... 70 °C
Degree of protection front	IP65
Signal volume	max. 90 dB 10 cm, 24 V max. 80 dB 10 cm, 12 V

Georg Schlegel GmbH & Co. KG
Kapellenweg 4
88525 Dürmentingen / Germany

+49 (0) 7371 / 502-0
info@schlegel.biz
www.schlegel.biz

Electrical data


Signal frequency	3.8 ± 0.5 kHz
Supply voltage	12 V ... 24 V AC/DC
Supply operating current	5 mA DC 12 V 16 mA DC 12 V

Mechanical data


Connection	Faston terminals 2.8 mm x 0.8 mm

Technical drawings

Dimensional drawing

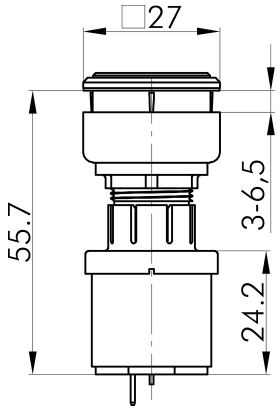

Cutout dimensions

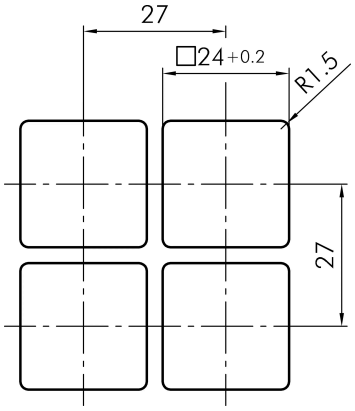

Georg Schlegel GmbH & Co. KG
Kapellenweg 4
88525 Dürmentingen / Germany

+49 (0) 7371 / 502-0
info@schlegel.biz
www.schlegel.biz