

# Datasheet

→ **JRSSA28E** 

11/04/2024



## Technical Data

Key actuator, momentary

|        |               |
|--------|---------------|
| Series | RONDEX-JUWEL® |
| Rubric | Key switch    |
| Shape  | round         |



## → General Data


|                       |                             |
|-----------------------|-----------------------------|
| Illumination          | No                          |
| Protection class      | IP65                        |
| Approvals             | CCC, CE, cULus, DNVGL, UKCA |
| Operating temperature | -25 ... 70 °C               |
| Storage temperature   | -40 ... 80 °C               |
| Mounting position     | any                         |
| Mounting aperture     | Ø 22.3 mm                   |
| Front frame color     | anthracite                  |

## → Mechanical Data


|                                   |                                 |
|-----------------------------------|---------------------------------|
| Tightening torque (fastening nut) | min. 1.5 Nm<br>max. 2.2 Nm      |
| Operating travel                  | 6 mm                            |
| Switching function                | Momentary function              |
| Switching position                | 0° Key removal<br>45° momentary |

## Technical Drawings

→ Dimensional drawing

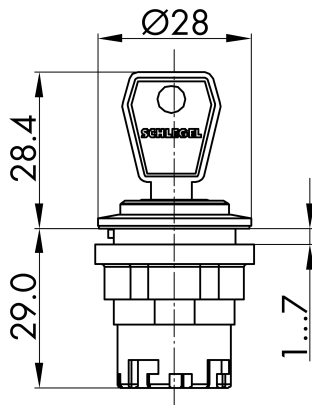

→ Cutout dimensions

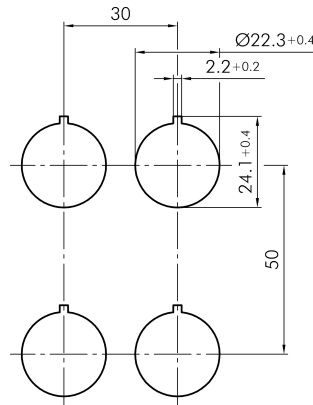

→ Position indicator

