

Datasheet

→ KRJMTLR

06/16/2026



Technical data

Pushbutton head with ring illumination

Type	KRJMTLR
Series	KOMBITAST®-R-JUWEL
Rubric	Pushbutton
Approvals	CE, cULus, DNVGL, UKCA



→ General data

Design	Round
Illumination	Yes
Labelling option	Yes
Operating temperature	-40 °C ... 70 °C
Panel cut-out	Ø 30.5 mm
Mounting plate thickness	1 mm ... 8 mm
Color actuator	Silver-coloured
Front bezel colour	Silver-coloured
Colour illuminated ring	Clear
Weight	18.4 g
Storage temperature	-50 °C ... 85 °C
Ring illumination	Yes

Degree of protection front IP69K

Degree of protection NEMA
information acc. to UL 60947-5-1 / NEMA 4x indoor
CSA-C22.2 No. 60947-5-1

→ **Mechanical data**

Operating travel 6 mm


Tightening torque fixing nut max. 2.5 Nm

Mechanical lifetime 1,000,000 switching cycles

Switching function Momentary function

Technical drawings

→ Dimensional drawing

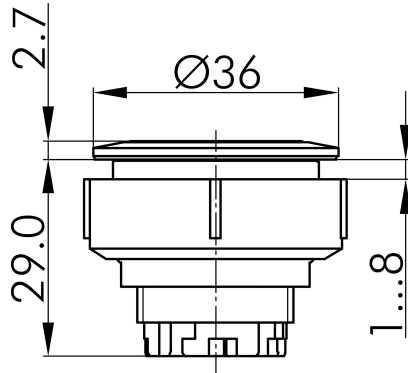

→ Cutout dimensions

