

OKSSA18

11.10.2022

Key actuator, maintained



General Data

Type reference	OKSSA18
Description	Key switch, maintained
Approvals	CCC, CE, cURus, UKCA
Degree of protection	IP65
Max. storage temperature	-50°C ... 85°C
Max. operating temperature	-25°C ... 70°C
Mechanical life	The mechanical life time depends on the type and number of contact blocks being used.




Technical data

Mounting aperture	16.2 mm
Mounting position	any
Panel thickness	1.0...5.0 mm
Range	OKTRON®
Illumination	none
Labelling option	no
Colour	silver-coloured
Shape	square

Data cc. to UL508/ CSA 22.2 No. 14-18

Enclosure Type	Type 1 indoor
----------------	---------------



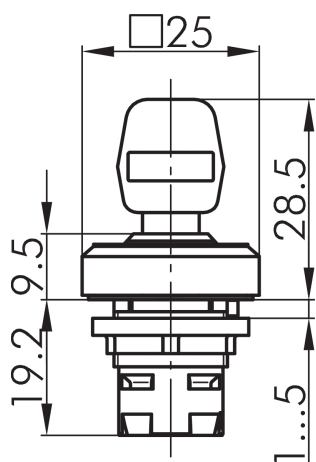

I = Schaltstellung / Switching position / Position de contact
 > = Federrückzug / Spring return / Rappel par ressort
 O = Schlüsselabzugstellung / Key removable position Retrait de la clé

