

# Datasheet

## → OKSSA12

03/09/2026



### Technical data

Key actuator, maintained

Type	OKSSA12
Series	OKTRON®
Rubric	Key-operated switch
Approvals	CCC, CE, UKCA, UR



### → General data

Design	Square
Operating temperature	-25 °C ... 70 °C
Panel cut-out	Ø 16.2 mm
Front bezel colour	Charcoal
Storage temperature	-50 °C ... 85 °C
Degree of protection front	IP65

### → Electrical data

Enclosure type information acc. to UL	Type 1 indoor
--	---------------

### → Mechanical data

Mounting position	Any
Mounting plate thickness	1,0 mm ... 5,0 mm
Switching function	Latching function

Switching position


-90° maintained, key removable  
 0° key removable  
 90° maintained, key removable

**Note**


- Includes 2 keys
- Different locking possible on request

**Technical drawings**

→ Dimensional drawing

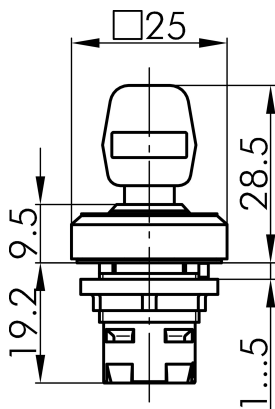

→ Cutout dimensions

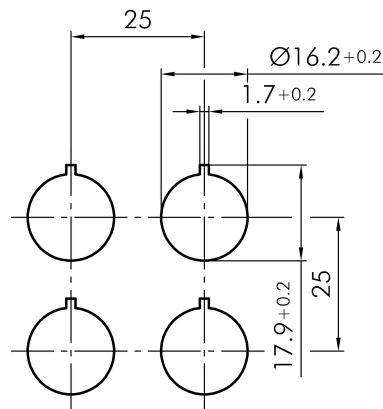

→ Position indicator

