

OKJUV

06.06.2024

Emergency-stop head Ø 28mm



General Data

Type reference:	OKJUV
Description:	Emergency-stop head, foolproof
Approvals:	CCC, cCSAus, TÜV_SÜD, CE, UKCA, UR
Degree of protection:	IP65 / IP67
Max. storage temperature:	-50°C ... 85°C
Max. operating temperature:	-30°C ... 70°C
Mechanical life:	30,000 switching cycles


Technical data

Mounting aperture:	23.1 x 23.1 mm
Tightening torque (mounting nut):	max. 1.5 Nm
Release:	twist release, left or right
Mounting position:	any
Standards:	EN 60947-5-1, EN 60947-5-5, EN ISO 13850

Note

- with switching position indicator
- foolproof acc. to EN ISO 13850

Dimensional drawing

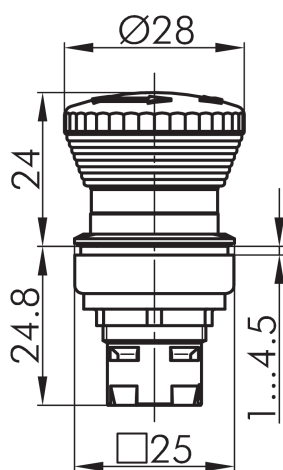

Drilling pattern

