

JRSSA17E

07.11.2022

Key actuator, maintained



General Data

Type reference	JRSSA17E
Description	Key switch, maintained
Approvals	CCC, CE, cULus, DNVGL, UKCA
Degree of protection	IP65
Max. storage temperature	-40°C ... 80°C
Max. operating temperature	-25°C ... 70°C
Mechanical life	see *1)
Electrical life (rated load)	see *2)

Additional data

Mounting aperture	22.3 mm
Tightening torque (mounting nut)	1.5 ... 2.2 Nm
Panel thickness	1-0...7.0 mm
Mounting position	any
Standards	EN 60947-5-1, EN 61058-1

Note

SSA... key actuator head (charcoal)




Can be used with the following contact blocks:
MT..., ET..., DT..., DST...

*1.2) Lifetime specifications:
The mechanical and electrical life time depends on the kind of pushbutton or switch (pushbutton, selector/key switch, ...) and the contact block being used as well as on the number of contact blocks

Data acc. to UL 60947-5-1 / CSA-C22.2 No. 60947-5-1

NEMA TYPE	1 indoor
-----------	----------



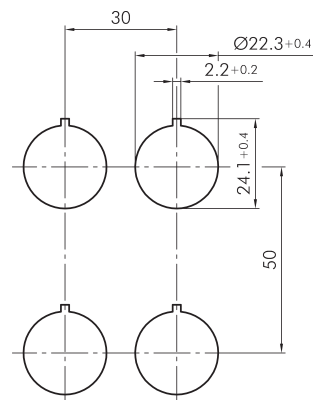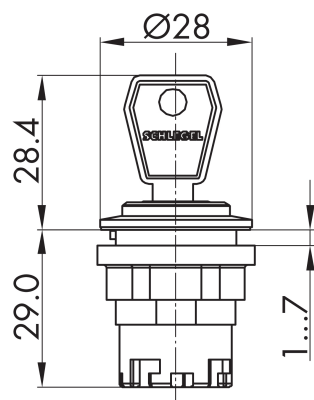

Légende:	
I=Position de commutation >=Rappel par ressort	O=Retrait de la clé
Legende:	
I= Schaltstellung >= Federrückzug	O= Schlüsselabzugstellung
Legend:	
I= Switching position >= Spring return	O= Key removable position

