

RXBLUV

06.06.2024

Illuminated emergency-stop head



General Data

Type reference:	RXBLUV
Description:	Illuminated emergency-stop head, foolproof
Approvals:	CCC, TÜV_SÜD, CE, UKCA
Degree of protection:	IP65
Max. storage temperature:	-50°C ... 85°C
Max. operating temperature:	-30°C ... 70°C
Mechanical life:	50,000 switching cycles

Technical data

Mounting aperture:	16.2 mm
Tightening torque (mounting nut):	max. 1.5 Nm
Release:	twist release, left or right
Illumination:	24 V / 15 mA AC/DC
Mounting position:	any
Standards:	EN 60947-5-1, EN 60947-5-5, EN ISO 13850


Note

- with switching position indicator
- yellow anti-lock collar
- with LED ring illumination
- foolproof acc. to EN ISO 13850

Remark

Anschluss durch Anschlussmodul MAL mit Schraubanschlüssen 2x2,5mm² fingersicher nach VBG4; 2-adrige Litze 0.25mm² ,ca. 10cm lang mit angecrimptem BKL-Steckverbinder

Dimensional drawing

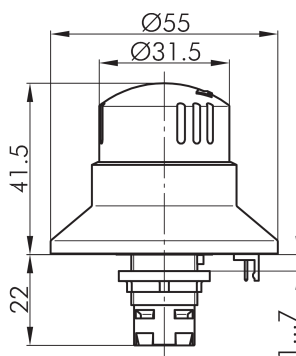

Drilling pattern

