Datasheet

➔ KRJMZSTB

10/28/2026

Technical data

3-position selector switch, two-part ram, momentary

Type	KRJMZSTB
Series	KOMBITAST®-R-JUWEL
Rubric	Selector switch
Approvals	CCC, CE, cULus, UKCA

Selector switches allow for the unambiguous selection of different operating modes, functions, or machine states. With their defined switching positions, they offer a high degree of operational safety and ensure clear identification of the selected function. Whether in manual, automatic, or service mode, selector switches are proven control elements for machines and systems that require reliable and traceable selection of operating modes.

➔ General data

Design	Round
Operating temperature	-40 °C ... 70 °C
Panel cut-out	Ø 30.5 mm
Mounting plate thickness	1 mm ... 8 mm
Front bezel colour	Silver-coloured
Weight	24.7 g
Storage temperature	-50 °C ... 85 °C
Degree of protection front	IP65
Degree of protection NEMA information acc. to UL 60947-5-1 / CSA-C22.2 No. 60947-5-1	NEMA 4x indoor

➔ Mechanical data

Tightening torque fixing nut	max. 2.5 Nm
Mounting position	Any
Switching function	Momentary function
Switching position	-45° momentary 0° zero position 45° momentary

Technical drawings

➔ Dimensional drawing

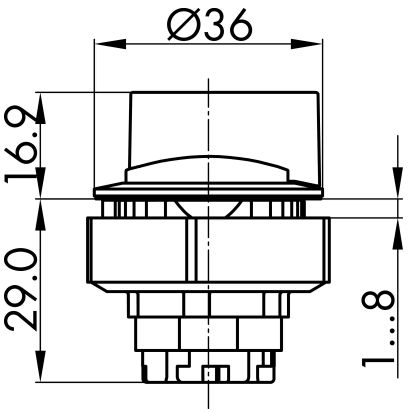

➔ Cutout dimensions

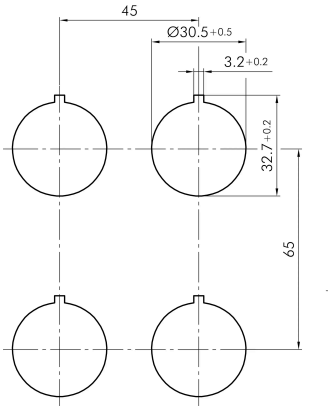

➔ Position indicator