

RXJBUV

06.06.2024

Emergency-stop head



General Data

Type reference:	RXJBUV
Description:	Emergency-stop head, foolproof
Approvals:	CCC, cURus, TÜV_SÜD, CE, UKCA
Degree of protection:	IP65
Max. storage temperature:	-50°C ... 85°C
Max. operating temperature:	-30°C ... 70°C
Mechanical life:	50,000 switching cycles

Technical data

Mounting aperture:	22.3 mm
Tightening torque (mounting nut):	max. 1.5 Nm
Release:	twist release, left or right
Mounting position:	any
Standards:	EN 60947-5-1, EN 60947-5-5, EN ISO 13850


Note

- with switching position indicator
- yellow anti-lock collar
- foolproof acc. to EN ISO 13850

Data acc. to UL

Torque:	max. 1.5 Nm (head nut)
---------	------------------------

Dimensional drawing

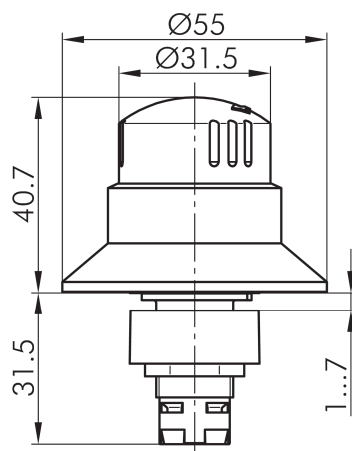

Drilling pattern

