

Datasheet

→ RVASSA12E_RT

08/03/2026



Technical data

Key switch, maintained

Type	RVASSA12E_RT
Series	RVA
Rubric	Key-operated switch
Approvals	CE, UKCA



→ General data

Design	Round
Operating temperature	-25 °C ... 70 °C
Panel cut-out	Ø 22.3 mm
Mounting plate thickness	1 mm ... 7 mm
Color actuator	Stainless steel
Front bezel colour	Stainless steel
Front ring colour	Red
Storage temperature	-40 °C ... 80 °C
Degree of protection front	IP65

→ Mechanical data

Operating travel $\pm 90^\circ$

Switching function Latching function


Switching position -90° maintained, key removable
0° key removable
90° maintained, key removable

Note


- Includes 2 keys
- Different locking possible on request

Technical drawings

→ Dimensional drawing

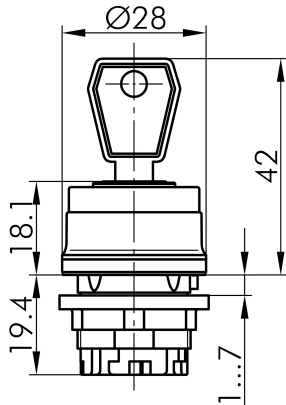

→ Cutout dimensions

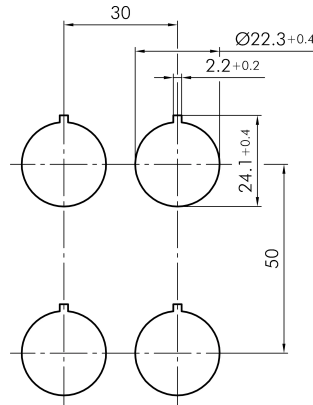

→ Position indicator

