

QRUVP

06.06.2024

Emergency-stop head for hygienic applications



General Data

Type reference:	QRUVP
Description:	Emergency-stop head, foolproof
Approvals:	CCC, cULus, cURus, TÜV_SÜD, CE, UKCA
Degree of protection:	IP66 / IP69K
Max. storage temperature:	-50°C ... 85°C
Max. operating temperature:	-30°C ... 70°C
Mechanical life:	> 6,050 switching cycles

Technical data

Mounting aperture:	22.3 mm
Tightening torque (mounting nut):	1.5 ... 2.2 Nm
Release:	twist release, left or right
Mounting position:	any
Standards:	EN 60947-5-1, EN 60947-5-5, EN ISO 13850
Shock resistance, IEC 60068-2-27:	50g at 11ms amplitude, semi-sinusoidal

Note

- limited UV resistance, permanent outdoor use without additional protection is not recommended
- foolproof acc. to EN ISO 13850


Use in hygienic areas:

- permanently suitable from -30°C to +40°C and with food contact temporarily up to +70°C
- migration testing (OML) according to EU regulation no.10/2011 using ethanol (50%) and acetic acid (3%) at 40°C/1h, ethanol (95%) at 40°C/0.5h
- The emergency stop should be installed in a way to exclude a deposit of residues in its active and non-active state.

Data acc. to UL508/ CSA 22.2 No. 14-13

NEMA TYPE:	Type 4X indoor use only
Torque:	1.5 ... 2.2 Nm (mounting nut)

Dimensional drawing

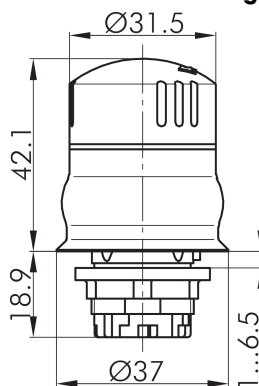

Drilling pattern

