# Datasheet
# → OKSSA17

07/31/2026

## Technical data

Key switch, maintained



| | |
|---|---|
| *Type* | OKSSA17 |
| *Series* | OKTRON® |
| *Rubric* | Key-operated switch |
| *Approvals* | CCC, CE, UKCA, UR |

## → General data

| | |
|---|---|
| *Design* | Square |
| *Operating temperature* | -25 °C ... 70 °C |
| *Panel cut-out* | Ø 16.2 mm |
| *Mounting plate thickness* | 1 mm ... 5 mm |
| *Front bezel colour* | Charcoal |
| *Storage temperature* | -50 °C ... 85 °C |
| *Degree of protection front* | IP65 |

## → Electrical data

| | |
|---|---|
| *Enclosure type information acc. to UL* | Type 1 indoor |

## ➔ Mechanical data


| | |
|---|---|
| *Mounting position* | Any |
| *Switching function* | Latching function |
| *Switching position* | -45° key removable<br>45° maintained |

**Note**


- Includes 2 keys
- Different locking possible on request

## Technical drawings


➔ Dimensional drawing

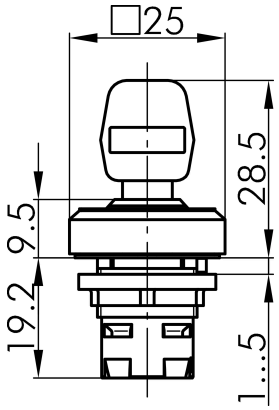


➔ Cutout dimensions

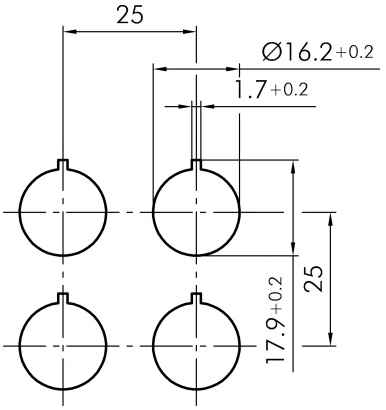


➔ Position indicator




Georg Schlegel GmbH & Co. KG
Kapellenweg 4
88525 Dürmentingen / Germany

+49 (0) 7371 / 502-0
info@schlegel.biz
www.schlegel.biz