

RKSSA13

07.02.2023

Key actuator, maintained



General Data

Type reference	RKSSA13
Description	Key switch, separate plungers, maintained
Approvals	CCC, CE, UKCA, UR
Degree of protection	IP65
Operation travel	3 mm
Max. storage temperature	-50°C ... 85°C
Max. operating temperature	-25°C ... 70°C
Mechanical life	The mechanical life time depends on the type and number of contact blocks being used.

Technical data

Mounting aperture	16.2 mm
Mounting position	any
Panel thickness	1.0...5.0 mm
Range	OKTRON®-R
Illumination	none
Labelling option	no
Colour	charcoal housing
Shape	round

Note




Key number: RKSSA17(_yyy); yyy represents the possible keys from 1-999.

- Key actuator head, 3 positions maintained, key removable in the centre position

Data cc. to UL508/ CSA 22.2 No. 14-18

Enclosure Type	Type 1 indoor
----------------	---------------



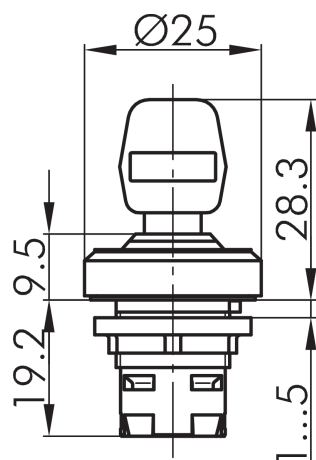

I = Schaltstellung / Switching position / Position de contact
> = Federrückzug / Spring return / Rappel par ressort
O = Schlüsselabzugstellung / Key removable position Retrait de la clé

