Datasheet

→ JRVASSA12E

03/10/2026

Technical data

Key actuator, maintained



Type	JRVASSA12E
Series	RONDEX-JUWEL®
Rubric	Key-operated switch
Approvals	CCC, CE, cULus, DNVGL, UKCA

→ General data

Design	Round
Operating temperature	-25 °C ... 70 °C
Panel cut-out	Ø 22.3 mm
Front bezel colour	Stainless steel
Storage temperature	-40 °C ... 80 °C
Standards	EN 60947-5-1 EN 61058-1
Degree of protection front	IP65

→ Mechanical data

Operating travel	6 mm
Tightenting torque fixing nut	1.5 Nm ... 2.2 Nm
Mounting position	Any
Mounting plate thickness	1,0 mm ... 7,0 mm

Georg Schlegel GmbH & Co. KG
Kapellenweg 4
88525 Dürmentingen / Germany

+49 (0) 7371 / 502-0
info@schlegel.biz
www.schlegel.biz


Switching function	Latching function
Switching position	-90° maintained, key removable 0° key removable 90° maintained, key removable

Note


- Includes 2 keys
- Differential locking possible on request
- SSA...key button suitable for the following contact elements: MT..., ET..., DT..., DST...

Technical drawings


➔ Dimensional drawing

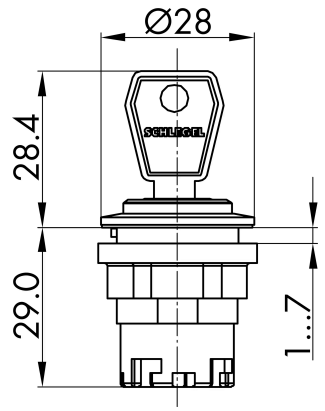

➔ Cutout dimensions

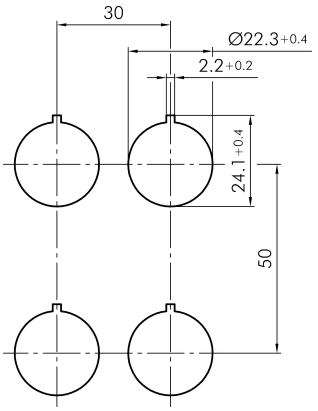

➔ Position indicator

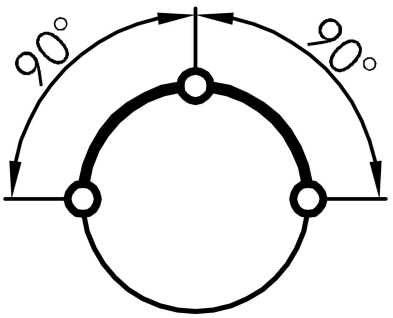

Awards

reddot award 2018
winner

Georg Schlegel GmbH & Co. KG
Kapellenweg 4
88525 Dürmentingen / Germany

+49 (0) 7371 / 502-0
info@schlegel.biz
www.schlegel.biz