

OKSSA31

30.01.2024

Key actuator, maintained (3 different keys)



General Data

Type reference	OKSSA31
Description	Key switch
Approvals	CE, cURus, UKCA
Degree of protection	IP65
Max. storage temperature	-50°C ... 85°C
Max. operating temperature	-25°C ... 70°C
Mechanical life	The mechanical life time depends on the type and number of contact blocks being used.

Technical data

Mounting aperture	16.2 mm
Mounting position	any
Panel thickness	1.0...5.0 mm
Range	OKTRON®
Illumination	none
Labelling option	no
Colour	charcoal housing
Shape	square




Note

- key number = _XXX
- different key number
- 3 positions maintained, key removable in the centre position

Data cc. to UL508/ CSA 22.2 No. 14-18

Enclosure Type	Type 1 indoor
----------------	---------------



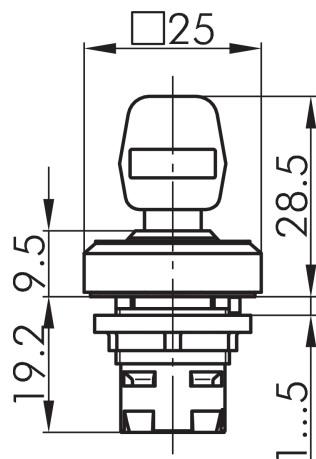

I = Schaltstellung / Switching position / Position de contact
> = Federrückzug / Spring return / Rappel par ressort
O = Schlüsselabzugstellung / Key removable position Retrait de la clé

