

# Datasheet

→ **RXBUV** 

06/12/2025



## Technical data

Emergency-stop head

|           |                        |
|-----------|------------------------|
| Type      | RXBUV                  |
| Series    | RX                     |
| Rubric    | Emergency-stop         |
| Approvals | CCC, TÜV_SÜD, CE, UKCA |



## → General data

|                            |                  |
|----------------------------|------------------|
| Design                     | Round            |
| Illumination               | No               |
| Can be labeled             | No               |
| Operating temperature      | -30 °C ... 70 °C |
| Panel cut-out              | Ø 16.2 mm        |
| Lens colour                | Red              |
| Front bezel colour         | Yellow           |
| Storage temperature        | -50 °C ... 85 °C |
| Degree of protection front | IP65             |

### General note

- with switching position indicator - yellow anti-lock collar - foolproof acc. to EN ISO 13850


## → Mechanical data

|                              |        |
|------------------------------|--------|
| Anti-lock collar             | Yes    |
| Tightening torque fixing nut | 1.5 Nm |

|                              |                             |
|------------------------------|-----------------------------|
| Mounting position            | Any                         |
| Release                      | Twist to release left/right |
| Mechanical lifetime          | 50,000 switching cycles     |
| Switching position indicator | Yes                         |

## Technical drawings

→ Dimensional drawing

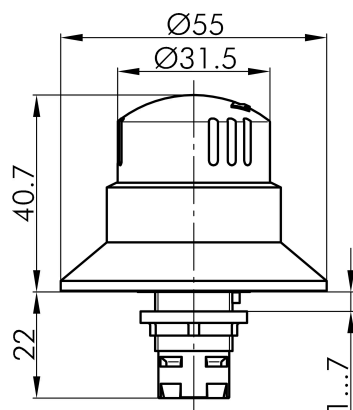

→ Cutout dimensions

